

STP200S-18/Ub


STP190S-18/Ub

Suntech's STPUB is designed and built to deliver highest efficiency and reliable power for on-grid residential and commercial systems worldwide. Relying on Suntech's well-known stringent manufacturing standards and latest PV technology, the module provides the highest possible energy output per Watt with total module efficiency of 13.6%. Superior conversion rate and exceptional low-light performance enable it to deal with the most challenging conditions of military, utility, residential and commercial installations. The module is the perfect choice for those who demand outstanding performance and exceptional uniform appearance.

Features and benefits

- High efficiency
- Nominal 18 V DC for standard output
- Outstanding low-light performance
- High transparent low-iron, tempered glass
- Unique techniques give the panel following features: esthetic appearance, with stands high wind-pressure and snow load, and easy installation
- Unique technology ensure that problems of water freezing and warping do not occur
- Design to meet unique demand of customer
- 25 year module output warranty

High Efficiency, High Quality PV Module

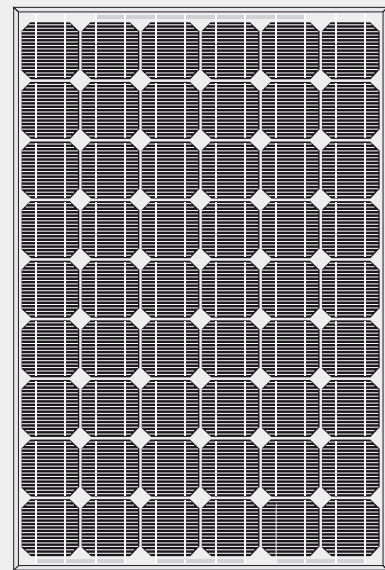


Electrical Characteristics

Model	STP200S-18/Ub	STP190S-18/Ub
Open-circuit voltage (Voc)	33.6V	33.2V
Optimum operating voltage (Vmp)	26.2V	26.2V
Short-circuit current (Isc)	8.1A	7.84A
Optimum operating current (Imp)	7.63A	7.25A
Maximum power at STC (Pmax)	200Wp	190Wp
Operating temperature	-40°C to +85°C	-40°C to +85°C
Maximum system voltage	1000V DC	1000V DC

STC: Irradiance 1000W/m², Module temperature 25°C, AM=1.5

Module Diagram

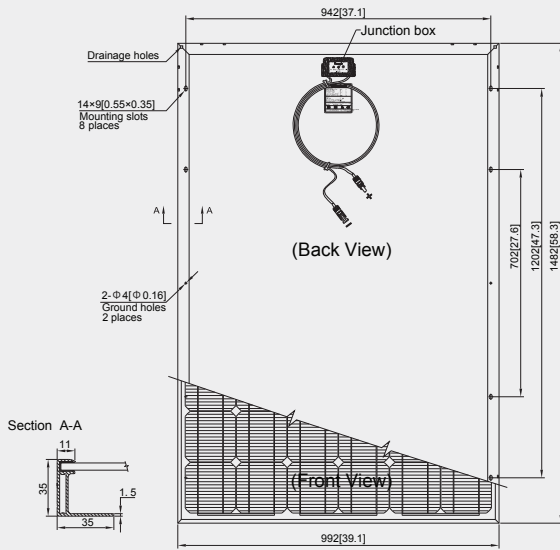

Note: mm[inch]

Specifications

Cell	Monocrystalline silicon solar cells 156mm×156mm
No. of cells and connections	54(6×9)
Dimension of module	1482mm×992mm×35mm
Weight	16.8kg

Temperature Coefficients

NOCT	48°C±2°C
Short-circuit current temperature coefficient	(0.055±0.01) %/K
Open-circuit voltage temperature coefficient	-(116±10) mV/K
Peak power temperature coefficient	-(0.48±0.05) %/K
Power tolerance	±3%

NOCT: Nominal Operating Cell Temperature
(the data is only for reference)

Output

Cable	LAPP(4.0mm ²)
Asymmetrical Lengths	1200mm(-) and 800mm(+)
Connection	MC Plug Type IV

Characteristics

Module IV Graph 200W

