

110W Semi-Flexible Solar Panel with Integrated Charge Controller

Soltronix brings together high-efficiency SunPower monocrystalline solar cells and PowerFilm's 30-plus years delivering custom solar solutions. The 110W solar panel includes semi-flexible fiberglass backing, whole-cell design for maximum power and reliability, and an integrated PowerBoost charge controller to provide the greatest total efficiency available on the market.


The Soltronix PowerBoost series of charge controllers incorporate high efficiency DC-DC converters and a proprietary power point tracking system to optimize power collected from the solar panel and delivered to a traditional 12V battery. Designed specifically for use with solar, PowerBoost charge controllers will not overcharge and reduce the lifetime of connected batteries as do common three-stage chargers connected to solar panels.

Soltronix also provides a proprietary encapsulation stack which includes ETFE for maximum UV protection and a custom layer of four other materials to provide impact resistance and durability far above industry norms. Due to this unique stack Soltronix panels can withstand significant impacts before losing any power.

Leveraging decades of expertise in custom encapsulations and solar electronics, the 110W solar panel provides unsurpassed efficiency and reliability for your applications.

Tips For Best Use:

- Angle the solar panel toward the sun for best results
- Place in a location without shadows or shading
- Routinely clean the solar panel to ensure best performance

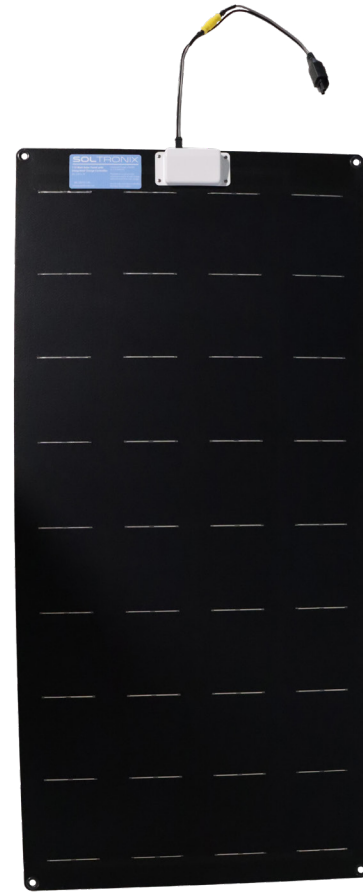


Benefits Include:

- High-efficiency SunPower cells
- Integrated PowerBoost charge controller
- Features Fixed PowerPoint Tracking (FPPT)
- Sustains damage without total power loss
- Over-charge protection
- Semi-flexible design
- Rugged encapsulation

110W Semi-Flexible Solar Panel with Integrated Charge Controller

Electrical Characteristics

Battery Charge Type	12V Battery (Flooded and AGM)
Charging Voltage	13.8V (float) 14.5V (max)
Charging Efficiency	88-91%
Output To PowerBoost Charge Controller	Nominally 110W
Effective Power To Battery	97W

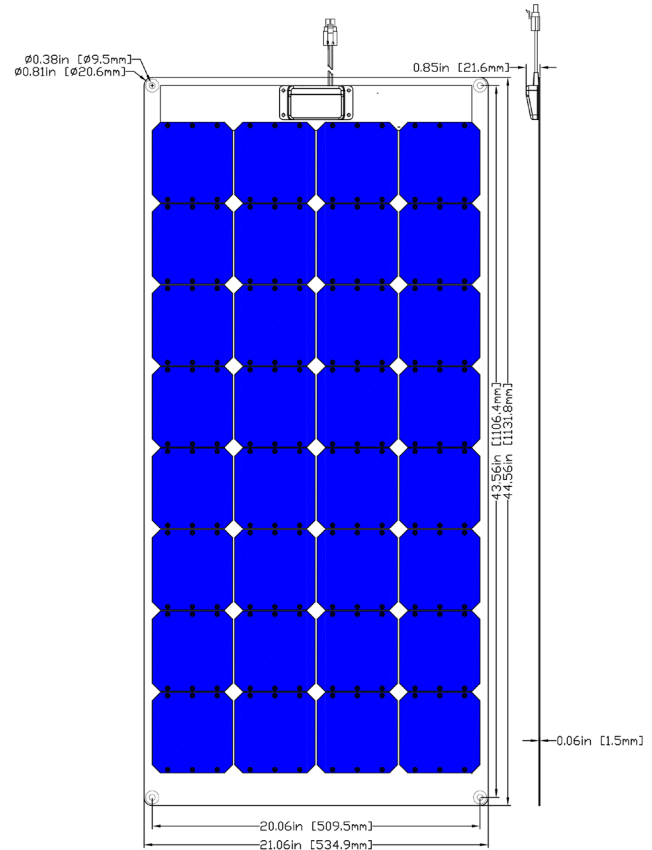

Physical Characteristics

Part Number	R3-32F13.7V
Dimensions	44.5 x 20.9 x 0.1 inches 1,130.3 x 530.9 x 2.5 mm
Weight	5.5 lbs 2.5 kg

Thermal Characteristics

Temperature Coefficient for Power	- 0.29(%/C)
Temperature Coefficient for Voltage	-1.74 (mV/C)

Connectors

Standard Connector:

Aptiv Weather Pack



Custom Connectors:

SAE

Anderson Powerpole

Barrel

Customer Specified



*NOTES:

- Panel manufacturer and advertised panel output. Plot points are calculated outputs from IV curve.
- MPPT / FPPT aren't commonly found with panels under 100W. Mpp is calculated from specs published with panel.
- Largest drop in power to battery when panel voltage is higher than battery requirement. PWM charge controllers discard power above current battery level.

Power Comparison

